


CoolBlock® HB-28 Square Pin Fin LED Cooler

Features & Benefits

- The CoolBlock® HB-28 square Pin Fin LED cooler is specifically designed for luminaires using the 28 emitters LED board platform. Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- For flood light, high bay and street light designs from 3,800 to 7,600 lumen
- Thermal resistance Rth 1.16°C/W
- Accommodating LED boards with 28 high power LEDs like the ADURA Sinkpad™ and Cezos Osram K219 LED PCB's, direct mounting with just a few screws.
- Direct fit with Ledil Stradella IP-28 family lenses for IP67 waterproof designs in various beam patterns
- Star-shaped pins for enhanced rigidity and cooling surface
- W106.5mm - L106.5mm - H62mm
- With CoolConnect® Gland becomes IP67 waterproof cable feed-through

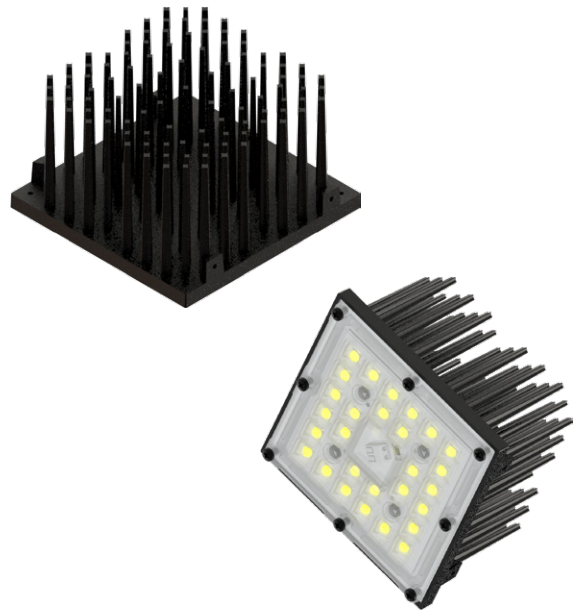

Order Information



Example : CoolBlock® HB-28-B


CoolBlock® HB-28- **1**

- 1** Electro-coating Color
 B - Black
 Z - custom (specify)

Simple mounting with M3 screws
 Screws are available from MechaTronix

CoolBlock® HB-28 Square Pin Fin LED Cooler

Product Details



Model n°

CoolBlock® HB-28

Dimension (mm) ^{*1}	W106.5mm - L106.5mm - H62mm
Volume (mm ³)	113950
Cooling Surface (mm ²)	96773
Weight (gr)	305
Thermal Resistance (°C/W) ^{*2}	1.16
Power Pd (W) ^{*3}	43
Heat Sink Material	ADC12
Surface finishing	Black electro-coating

^{*1} 3D files are available in ParaSolid, STP and IGS on request

^{*2} The thermal resistance Rth is determined with a dummy heater of 65mm x 65mm central placed on the heat sink, Tamb 35° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

^{*3} Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula: $Pd = Pe \times (1 - \eta L)$

Pd - Dissipated power

Pe - Electrical power

ηL = Light efficiency of the LED module

Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.