


CoolBlock® LX-01-2x6 Rectangle Pin Fin LED Cooler

Features & Benefits

- The CoolBlock® LX-01-2x6 rectangle Pin Fin LED cooler is specifically designed for luminaires using the 2x6 platform. Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- For flood light, high bay and street light designs from 4,400 to 8,700 lumen
- Thermal resistance R_{th} 1.09°C/W
- Accommodating LED boards with 12 high power LEDs like the Lumileds Luxeon XR-TX, Cezos Osram PCB's and Seoul Semiconductor SMJD-3625012F, direct mounting with just a few screws.
- Direct fit with Ledil Strada-IP-2x6, HB-IP-2x6 series and Khatod NACTUS 6x2 series lenses for IP67 waterproof designs in various beam patterns
- Star-shaped pins for enhanced rigidity and cooling surface
- Simple extension by using CoolConnect® Inter-01 double headed bridge screw
- W80mm - L192mm - H45mm
- With CoolConnect® Gland becomes IP67 waterproof cable feed-through

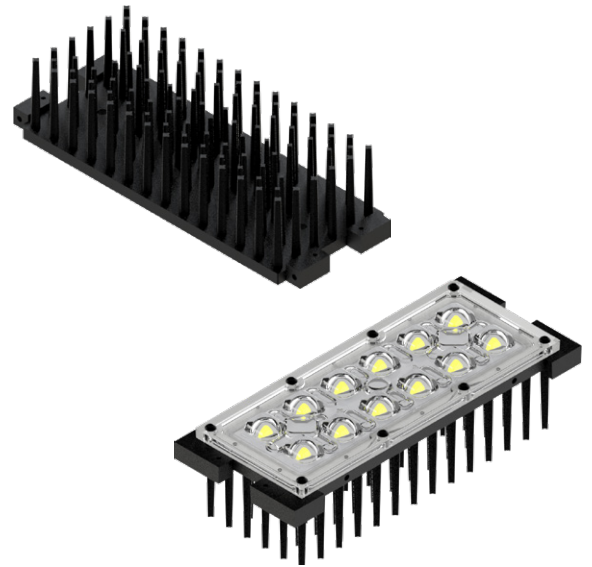

Order Information



CEZOS

OSRAM
Opto Semiconductors

LEDiL®

LED Light for you
powered by OSRAM
CERTIFIED PARTNER

KHATOD®
Optical Solutions for LED Lighting



SEOUL SEMICONDUCTOR

Example : CoolBlock® LX-01-2x6-B

CoolBlock® LX-01-2x6- **1**


1 Electro-coating Color

B - Black
Z - custom (specify)

Recommended screw force 6lb/in
Screws are available from MechaTronix

CoolBlock® LX-01-2x6 Rectangle Pin Fin LED Cooler

Product Details

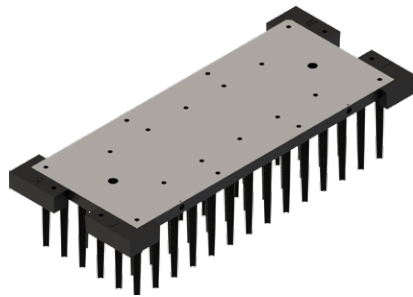

Model n°

CoolBlock® LX-01-2x6

Dimension (mm) ^{*1}	W80mm - L192mm - H45mm
Volume (mm ³)	128470
Cooling Surface (mm ²)	84621
Weight (gr)	340
Thermal Resistance (°C/W) ^{*2}	1.09
Power Pd (W) ^{*3}	45.8
Heat Sink Material	ADC12
Surface finishing	Black electro-coating

^{*1} 3D files are available in ParaSolid, STP and IGS on request

^{*2} The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

^{*3} Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula: $Pd = Pe \times (1 - \eta_L)$

Pd - Dissipated power

Pe - Electrical power

η_L = Light efficiency of the LED module

Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.