



IceLED



ø99 x H45 / 55 (mm)
 Rth 0.58 - 0.46 °C/W
 Power Pd 85.5 - 109 W

[MORE PRODUCT DETAILS](#)

IceLED | Luminus Modular Active Star LED Cooler ø99mm


Mounting Instruction



Patented, high performance Luminus LEDs are the brightest and most versatile solid state light sources available today, redefining the solid state lighting landscape by enabling the adoption of LED technology into emerging markets. Luminus technology is used in commercial and industrial lighting fixtures, theatrical lighting, projectors, signs, medical equipment, UV curing... just about anywhere a bright, efficient, reliable, long-life light source is needed.

Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.




Luminus Xnova Studio COB Array

Model names

- CVM-14

Mounting

- With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2021
 Ideal Industries Chip-Lok™ holder 50-2103CT
 TE Connectivity Lumawise type Z50 2213254-1
 TE Connectivity Lumawise type Z50 2213254-2
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks

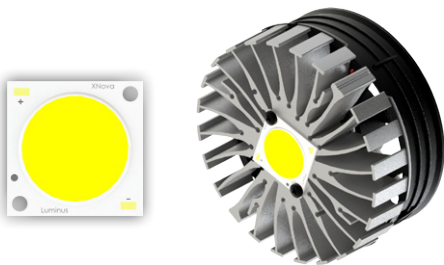

Luminus Xnova COB Array

Model names

- CLM-22
- CXM-22
- CHM-22

Mounting

- Direct mounting with 2 self tapping screws M3 x 6mm
 Red indicator marks
- With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2033
 TE Connectivity Lumawise type Z50 2213480-1
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks