

IceLED



ø99 x H45 / 55 (mm)  
 Rth 0.58 - 0.46 °C/W  
 Power Pd 85.5 - 109 W

[MORE PRODUCT DETAILS](#)

## IceLED | Luminus Modular Active Star LED Cooler ø99mm


### Mounting Instruction



Patented, high performance Luminus LEDs are the brightest and most versatile solid state light sources available today, redefining the solid state lighting landscape by enabling the adoption of LED technology into emerging markets. Luminus technology is used in commercial and industrial lighting fixtures, theatrical lighting, projectors, signs, medical equipment, UV curing... just about anywhere a bright, efficient, reliable, long-life light source is needed.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.




#### Luminus Gen 4 COB Array

##### Model names

- CXM-18

##### Mounting

- With Zhaga Book 3 LED holder  
 BJB spotlight connector 47.319.2281  
 Mounting with 2 self tapping screws M3 x 6mm  
 Green indicator marks

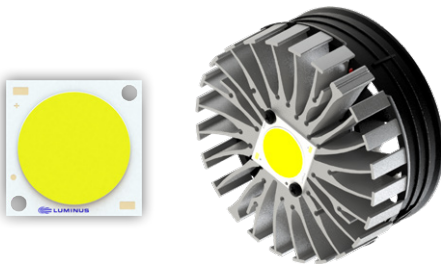


#### Luminus Gen 4 COB Array

##### Model names

- CIM-22
- CLM-22
- CXM-22
- CGM-22

##### Mounting

- Direct mounting with 2 self tapping screws M3 x 6mm  
 Red indicator marks
- With Zhaga Book 3 LED holder  
 BJB spotlight connector 47.319.2033  
 Bender+Wirth 631a  
 Mounting with 2 self tapping screws M3 x 6mm  
 Green indicator marks

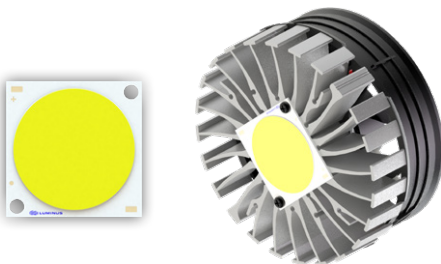


#### Luminus Gen 4 COB Array

##### Model names

- CXM-32

##### Mounting

- Direct mounting with 2 self tapping screws M3 x 6mm  
 Blue indicator marks

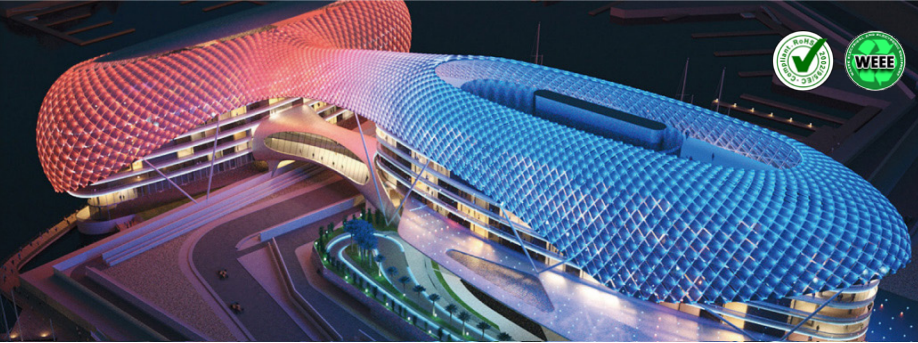

## IceLED | Luminus Modular Active Star LED Cooler ø99mm

### Mounting Instruction



#### Luminus Gen 3 COB Array

##### Model names

- CXM-22 (AC)

##### Mounting

- Direct mounting with 2 self tapping screws M3 x 6mm  
Red indicator marks
- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2033  
Bender+Wirth 631a  
Mounting with 2 self tapping screws M3 x 6mm  
Green indicator marks



#### Luminus Gen 3 COB Array

##### Model names

- CXM-32 (AC)

##### Mounting

- Direct mounting with 2 self tapping screws M3 x 6mm  
Blue indicator marks