

ø99 x H75 (mm)
Rth 0.25 °C/W
Power Pd 200 W

[MORE PRODUCT DETAILS](#)

IceLED Ultra VS | Cree XLamp Modular Active Star LED Cooler ø99mm

Mounting Instruction



Cree XLamp® LEDs deliver the industry's best lighting-class performance and are application-optimized to enable the lowest system cost.

Cree's new CXA LED Arrays deliver high lumen output and efficacy in a family of single, easy-to-use components. Optimized to simplify designs and lower system cost, Cree's CXA LED arrays are available in system level performance from 300 to over 16,000 lumens and can enable applications ranging from GU10s and commercial downlights to outdoor area lighting and high-bay lighting.

Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



Cree XLamp CXA18 / CXB18 LED Array



Model names

- CXA1830-xxxx
- CXB1830-xxxx
- CXA1850-xxxx

Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2131 (CXA/CXB1830 excluded)
- Ideal Industries Chip-Lok™ holder 50-2101CR
- TE Connectivity Lumawise type Z50 2213401-1
- TE Connectivity Lumawise type Z50 2213401-2
- Mounting with 2 self tapping screws M3 x 6mm
- Green indicator marks

Cree XLamp CXA25 / CXB25 LED Array



Model names

- CXA2520-xxxx
- CXA2530-xxxx
- CXB2530-xxxx
- CXA2540-xxxx
- CXB2540-xxxx
- CXA2590-xxxx

Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2141
- Ideal Industries Chip-Lok™ holder 50-2102CR
- TE Connectivity Lumawise type Z50 2213407-1
- TE Connectivity Lumawise type Z50 2213407-2
- Mounting with 2 self tapping screws M3 x 6mm
- Green indicator marks

Cree XLamp CXA30 / CXB30 LED Array





Model names

- CXA3050-xxxx
- CXB3050-xxxx
- CXA3070-xxxx
- CXB3070-xxxx

Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2151
- Ideal Industries Chip-Lok™ holder 50-2234C
- Mounting with 2 self tapping screws M3 x 6mm
- Green indicator marks

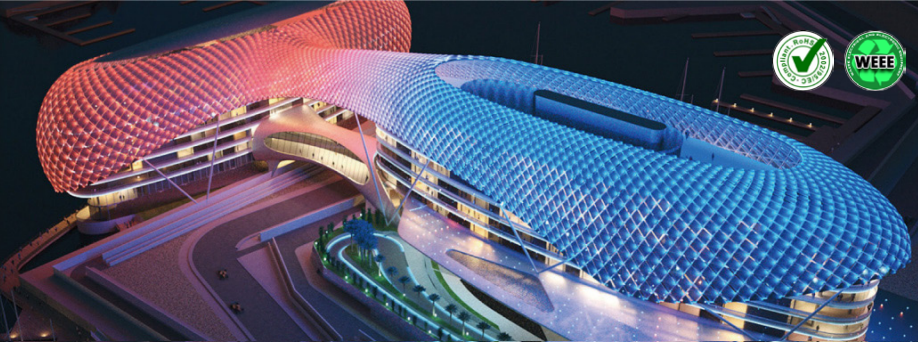


ø99 x H75 (mm)
Rth 0.25 °C/W
Power Pd 200 W

[MORE PRODUCT DETAILS](#)

IceLED Ultra VS | Cree XLamp Modular Active Star LED Cooler ø99mm

Mounting Instruction



Cree XLamp CMT28 LED Array

Model names

- CMT2890

Mounting

- With Zhaga Book 3 LED holder
TE Convertivity Lumawise type Z50 2213480
Bender+Wirth Hybrid holder 631b available with different housings
Mounting with 2 self tapping screws M3 x 6mm
Green indicator marks