

ø152 x H100 / 150 (mm)  
Rth 0.52 - 0.46 °C/W  
Power Pd 95 - 110 W

**MORE PRODUCT DETAILS**

## ModuLED Giga-HBG | Lumileds High Bay LED Cooler ø152mm with driver connection system



### Mounting Instruction



Lumileds LUXEON COB is a new breakthrough in efficacy for arrays. Due to its industry leading small Light Emitting Surfaces (LES), the COB array is very easy work with and will enable easier and less expensive designs. All LUXEON COBs are available in a single 3-step as well as a single 5-step MacAdam Ellipse, ensuring uniform optical performance in the application. Ideal applications include down lights and directional lamps.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.

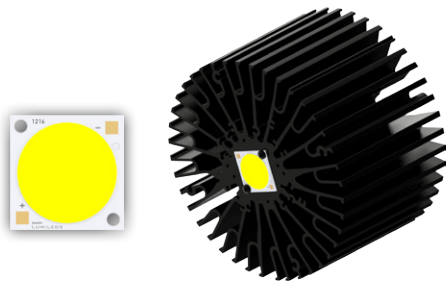


#### Gen 4 Luxeon CoB Core Range 1216

##### Model names

- L2C5-xxxx1216x2300

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Red indicator marks
- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2030  
Ideal Industries Chip-Lok™ holder 50-2204CT  
Mounting with 2 screws M3 x 6mm  
Green indicator marks

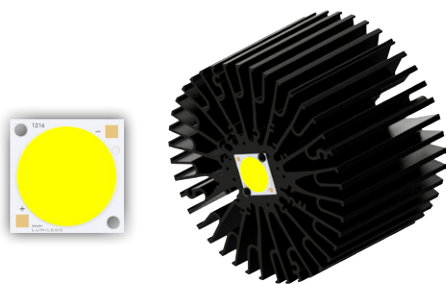


#### Gen 4 Luxeon CoB Core Range 1812

##### Model names

- L2C5-xxxx1812G2300

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Red indicator marks
- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2030  
Ideal Industries Chip-Lok™ holder 50-2204CT  
Mounting with 2 screws M3 x 6mm  
Green indicator marks

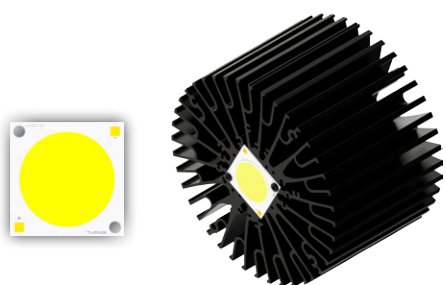

#### Gen 4 Luxeon CoB Core Range 1321 - 1825

##### Model names

- L2C5-xxxx1321E2900
- L2C5-xxxx1825G3200

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Yellow indicator marks